

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.  
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

**SAFETY PRECAUTIONS**

Read label before use. Keep out of reach of children. Causes mild skin irritation. May cause an allergic skin reaction. Suspected of causing cancer. Toxic to aquatic life with long lasting effects. Harmful to the soil environment.

**PRECAUTIONS**

AVOID BREATHING MIST, VAPOURS OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well-ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Contaminated work clothing should not be allowed out of the workplace. Avoid release to the environment. Obtain special instructions before use.

**FIRST AID**

IF SWALLOWED: Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation occurs get medical advice. Take off all contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Continue rinsing. If eye irritation persists get medical advice or attention.

If exposed or concerned get medical advice or attention. When seeking medical advice take this container with you.

Further information can be obtained from  
AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766) or call Resene 0800 737 363.

CONTAINS: Zinc Phosphate 10-120 g/L.

For use as a surface preparation coating.  
For full technical instructions see Data Sheet D414.


**SPILLS:** Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways.

# Resene

## Laminate and Melamine Primer

exterior/interior waterborne

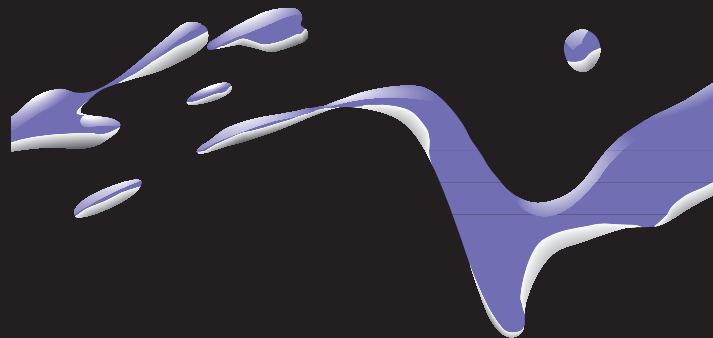

DO NOT  
TINT

Resene Laminate and Melamine Primer is a waterborne 'adhesion primer' designed for use over a series of surfaces usually considered difficult to coat or in need of expensive pre-treatment. Fast drying, easy application and wide compatibility with Resene waterborne topcoats.

For old, varnished surfaces, use Resene Waterborne Sureseal (see Data Sheet D42a).

**Preparation**

- Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil-based wood finishes or similar) and salt.

- Interior – clean down surfaces to be painted with Resene Interior Paintwork Cleaner to remove grease and oil paying particular attention to hand contact areas. For best adhesion sand the surface to profile with 240 grit sandpaper and wipe down with a damp cloth to remove sanding dusts.

- Exterior – scrub down surfaces to be painted using Resene Paint Prep and Housewash diluted and used to label instructions. DO NOT ALLOW THE WASH SOLUTION TO DRY OUT ON THE SURFACE (this includes window glass and joinery). Rinse clean or hose down with copious amounts of fresh water ensuring all wash solution and surface chalk residues are removed.

- All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate-based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.

- Consult your Resene ColorShop or reseller for technical advice if corrosion is present.

- This product may be used to paint a variety of surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller for advice.

**Application**

- Using a brush or Resene No.4 roller sleeve, apply a thin coat of Resene Laminate and Melamine Primer. The primer is not designed to achieve opacity, the thinner the adhesion coat the better. Allow to

cure without water contact for at least 12 hours before overcoating. Leaving to cure for at least 48 hours will allow maximum development of adhesion.

- Ensure good ventilation of the painted area is maintained during curing as a chemical odour will be released as the primer cures. Delaying overcoating allows for faster release of the odour.

- The new paint system will take 5 days to develop good initial adhesion and continue to cure for an additional 3 weeks until full cure occurs. In the early stages the paint surface will not have good resistance to cleaners or abrasion as these features develop as the film undergoes curing.

- Painting will not reproduce the original features of the laminate, melamine or tiles.

**Be PaintWise**

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information. Please recycle.

UN 3082, ENVIRONMENTALLY  
HAZARDOUS SUBSTANCE,  
LIQUID, N.O.S. (PAINTS)



Laminate and Melamine Primer SDS



Laminate and Melamine Primer TDS

**Resene**

the paint the professionals use

In Australia: Resene Paints (Aust) Limited  
7 Production Ave, PO Box 918, Ashmore City, QLD 4214  
Ph 1800 738 383 Visit [resene.com.au](http://resene.com.au)

In New Zealand: Resene Paints Limited  
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045  
Ph (04) 577 0500 Visit [resene.co.nz](http://resene.co.nz)

**Quick check**

**Use on:** As a pre-treatment on laminated surfaces, Formica®/Melteca®, melamine laminates and glazed tiles.

**Coverage:** 11 square metres per litre per coat. This product is designed as a thin application to provide a grip coat for the topcoats. It is not intended to provide opacity.

**Dry time (minimum):** Touch dry 30 minutes. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

**Overcoating:** Resene Laminate and Melamine Primer is not designed to give long-term exterior protection without overcoating. Leaving to cure for at least 48 hours will allow maximum development of adhesion.

**Number of coats:** One.

**Application method:** Brush, speed brush, or Resene No.4 roller. Light bubbling may occur with some rollers and will require laying off.

**Thinning:** Water.

**Clean up:** Water when wet. Resene Brush Cleaner when dry.

**Colour:** Pastel blue/green when wet, off-white on drying.

**Before use:** Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause standard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.